


DENSO[®]-Jet, -Fill, -Cord

Product information



Special advantages:

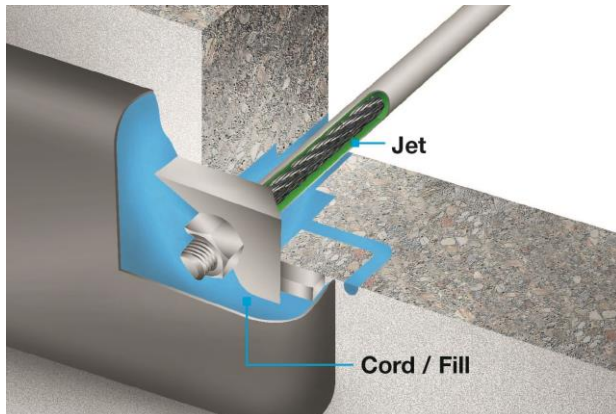

Operating temperatures up to +65°C (+149°F).



Ideal for prestressed anchors, prestressed braids and flange connections.



Low shrinking during cooling.



Very good moistening of steel surfaces.



High adhesion.

Permanent plastic corrosion prevention mastic on petrolatum basis for the molten pressure injection in prestressed anchor systems, prestressed braids and flange connections.

For a century now, DENSO Group Germany has been representing experience, quality and reliability for corrosion prevention and sealing technology. The success of the internationally leading corporation is based on the development of the "DENSO-Tape", which was already patented in 1927 as the first product worldwide for the passive corrosion prevention of pipelines. Since then, the DENSO Group Germany has been establishing and guaranteeing the highest quality standards with technically trend-setting products. Research, development and production take place exclusively in Germany. Our employees continuously implement safe and individual solutions in a personal cooperation with the customer.

Description

DENSO[®]-Jet, **DENSO[®]-Fill** and **DENSO[®]-Cord** are permanent plastic, meltable corrosion prevention mastics on petrolatum basis for the use in prestressed anchor systems, prestressed braids and between the flange plates. **DENSO[®]-Jet** and **DENSO[®]-Fill** are designed especially for molten pressure injections into cavities at prestressed anchor systems, **DENSO[®]-Fill** moreover for the gap at flange

connections. They differentiate itself with respect to their temperature stability of +40 °C (+104°F) for **DENSO[®]-Jet** and up to +65 °C (+149°F) for **DENSO[®]-Fill**.

Both mastics can be injected by a machine (molten) or through cartridges (slightly heated). **DENSO[®]-Jet** and **DENSO[®]-Fill** are available in practical package sizes matching any construction measure.

DENSO[®]-Cord has a very low melt viscosity (temperature dependent) and therefore it is ideally suited for long flow paths, e.g. of up to 50 m and small gaps and cavities that must be filled. Therefore, **DENSO[®]-Cord** will be processed for the filling of individual prestressed braids by using special equipment.

Usage

DENSO[®]-Jet

- Pressure injection into long, narrow cavities at prestressed anchors, e.g. into the annular gap between duct and prestressed steel in the area of the free steel length.
- Filling of the core of prestressed bundles by using special equipment.

- Filling the cavities in the area of the anchor head at permanent temperature stresses up to +40°C (+104 °F).

DENSO[®]-Fill

- Filling the cavities in the area of the anchor head at permanent temperature stresses +65°C (+149 °F).
- Filling of the annular space between prestressed anchor and fire

protection duct in structural design and bridge construction.

- Coating of steel protrusions exposed to the air.
- Molten filling of horizontal and vertical gaps at flange connections.

DENSO[®]-Cord

- Molten filling of individually encased prestressed braids by using special equipment.

Typical product properties

Property	Unit	Typical properties			Test method	
		DENSO®-Jet	DENSO®-Fill	DENSO®-Cord		
Operating temperature	°C (°F)	≤+40 (+104)	≤+65 (+149)	≤+40 (+104)		
Processing temperature	Machine injection	°C (°F)	+90 - +120 (+194 - +248)	+90 - +120 (+194 - +248)	+90 - +120 (+194 - +248)	
	Cartridge injection	°C (°F)	+40 - +85 (+104 - +185)	+40 - +85 (+104 - +185)		
Color	-	dark brown	brown	dark brown	-	
Density at 23 °C (73.4 °F)	g/cm ³	0.94	0.92	0.89	ISO 2811	
thermal Contraction coefficient +100°C to +23°C (+212 °F to +73.4 °F)	grd ⁻¹	0.61 *10 ⁻³	0.77 *10 ⁻³	0.94 *10 ⁻³	ISO 2811	
Dripping point according to Ubbelohde	°C (°F)	68	83	66	DIN 51801	
Viscosity (Rotational viscometer)	+55°C(+131°F)	mPa s	-	4000	500	DIN 53019-1
	+65°C(+149°F)		2000	1000	150	
	+85°C(+185°F)		450	350	50	
Water absorption (23°C / 73.4 °F)	1 day	wt. %	<0.01	<0.01	<0.01	DIN EN ISO 62
	23 days		0.08	0.08	0.12	
Saponification number	mg(KOH)/g	1.0	1.0	1.0	DIN EN 12068	
Specific electrical resistivity	Ohm *cm	>10 ⁹	>10 ⁹	>10 ⁹	DIN IEC 60093	

Ordering information and packaging

Product	Packaging	Content [kg]	Gross weight app. [kg]
DENSO®-Jet	Box with 10 cartridges each	10 x 0.25	3.4
	Hobbock 1)	20	22
	Barrel 2)	170	192
DENSO®-Fill	Box with 10 cartridges each	10 x 0.25	3,4
	Hobbock 1)	20	22
	Barrel 2)	170	192
DENSO®-Cord	Hobbock 1)	20	22
	Barrel 2)	160	182

1) Dimensions 350 mm x 360 mm.

2) Corrugation lid barrel with tension and bung hole top, dimensions 590 mm x 890 mm.

Storage

When stored in its original, unopened packaging, **DENSO®-Jet, -Fill, -Cord** can be stored for at least 60 months after the manufacturing date.

Storage temperature: ≤ +50°C (+122°F)

DENSO GmbH

P.O. Box 150120 | 51344 Leverkusen | Germany
Phone: +49 214 2602-0
www.denso-group.com | info@denso-group.com

Our product information, our application recommendations and other product related documents are made for your convenience only. Since many installation factors are beyond our control, the user shall determine the suitability of the products for the intended use and assume all risks and liabilities in connection therewith. All information contained in this document is to be used as a guide and does not constitute a warranty of specification. The information contained in the document is subject to change without notice. For this reason, no liability can be accepted for inaccurate advice or any failure to provide advice.

The user is responsible for checking the applications of the product and verifying its suitability for the intended use. Our General Terms of Sale, which are available at www.denso-group.com, shall be decisive without any exception.

This is a translation from the original German product information. In case of any discrepancy or any dispute arising on the interpretation of this product information, the German text of the respective German product information, which is available at www.denso-group.com, shall be decisive. The legal relationship shall be governed by German law.

11.2018