


TOK®-Band SK

Product information

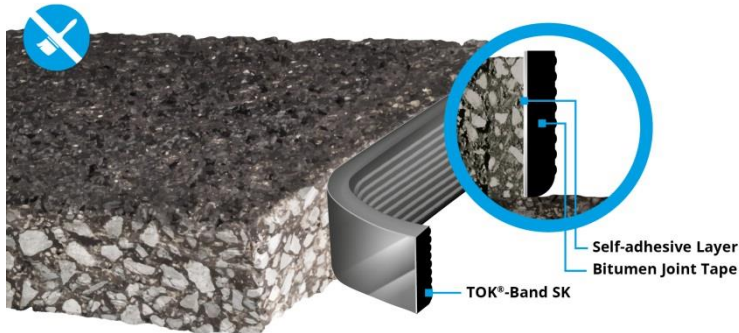

Special advantages:

Cold processed – no burner required.



No primer required.



Fulfils all requirements of ZTV Fug-StB 15.



Processing temperature from +5°C to +50°C (from +41°F to +122°F).

Self-adhesive bitumen joint tape for joints and seams in asphalt road construction.

Over the past century, DENSO Group Germany has built a reputation founded on experience, quality and reliability in corrosion prevention and innovative sealing technology. The success of the internationally leading Group is built on an invention that was patented as early as 1927 – "DENSO tape", the world's first product for passive corrosion prevention on pipelines. Since then, DENSO Group Germany has been setting the bar high, guaranteeing the highest standards of quality with pioneering technical products. All research, development and production activity takes place in Germany. Our employees work closely with our customers to create reliable individual solutions that stand the test of time.

Description

TOK®-Band SK is a high-quality bitumen joint tape made from polymer-improved road bitumen with exceptional stretch and adhesion properties. **TOK®-Band SK** has a homogeneous full-surface adhesive coating on one side (smooth side), and can therefore be applied to "cold" joint edges

quickly and safely, without the use of a gas burner. **TOK®-Band SK** can be applied without primer to properly prepared edges that are clean, dry and free of dust. The slightly profiled (wavy) side of the bitumen tape is the side without an adhesive coating. This side will later form the base

for the "hot" asphalt mix.

If necessary, the optional primer **TOK®-SK Primer** can be used to boost the adhesion of **TOK®-Band SK** to the joint edge.

Usage

TOK®-Band SK is ideal for sealing joints in asphalt road construction.

In accordance with ZTV Fug-StB, it is also used on components such as concrete

curbs and gutters where hot mix is subsequently applied on top.

Thanks to its outstanding material properties, permanent and fully sealed joints are guaranteed.

Typical product properties (test results in accordance with TL Fug-StB)

Test	Unit	Typical results range	Requirement
Softening point (Ring&Ball method)	°C/°F	> +100 (+212)	> +90 (+194)
Cone penetration	0.1 mm	20-50	20-50
Recovery	%	10-30	10-30
Cold bending behaviour	°C/°F	≤ ±0 (+32)	≤ ±0 (+32)
Stretch and adhesive strength	% / N/mm ²	≥ 10 / ≤ 1.0	≥ 10 / ≤ 1.0

Application

Weather conditions:

In accordance with ZTV Fug-StB, bitumen joint tapes may only be applied in dry weather and when the surface temperature of the asphalt is at least +5°C (+41°F).

At temperatures between 0°C and +5°C (+30°F and +41°F), the product may only be applied if additional measures are taken (e.g. preheating of edges).

Requirements for connection edges:

In accordance with ZTV Fug-StB, the following basic requirements apply: Edge surfaces must be solid, even and straight for the successful application of bitumen joint tape.

The connection edges must be bevelled, precision-milled or cut, or assembled using ready-made components.

They must be free of dirt. Rust particles on steel components must be removed. Any residual dirt left adhering to the surface

must be removed with a wire brush or compressed air. The edges must be dry.

Use of TOK®-Band SK:

If all of the requirements for connection edges are fully satisfied, **TOK®-Band SK** may be applied to the edge without primer. The relevant test results in accordance with TL/TP Fug-StB are available.

If necessary, you can optimise the adhesion of the bitumen joint tape to the edge by applying **TOK®-SK Primer**.

In summer, the drying time of **TOK®-SK Primer** is just 3 to 5 minutes, dependent on weather conditions, allowing further work to start quickly.

Application:

TOK®-Band SK is applied to the prepared connection edge with the adhesive layer (smooth side) facing upwards.

The anti-adhesive paper should be removed just before the tape is laid.

The adhesive surface (smooth side) of the

laid **TOK®-Band SK** is pressed onto the connection edge by hand or using a tool.

ZTV Fug-StB 15 – bitumen joint tapes:

In accordance with ZTV Fug-StB, bitumen joint tape must be laid with a 5-mm protrusion on rolled asphalt surface layers, so that a so-called "rivet head" is produced when rolling the asphalt. This forms an additional seal on the surface and provides a clean "closure".

In cast asphalt surfaces, the joint tape is laid flush to the edge.

The width of the joint tape must be at least **10 mm**.

In accordance with ZTV Fug-StB and TL Fug-StB, the quality of the material must be monitored by a third party and verified by placing an approval label on the packaging.



Ordering information and packaging

TOK®-Band SK is supplied on rolls. The rolls are sorted by cross-section size,

separated using silicone paper and delivered in boxes measuring (w x d x h) 370 mm x 370 mm x 160 (or 144) mm.

30 boxes are packed on one euro pallet (800 x 1200 mm).

Profile [HxW]	Article number	m/box	m/pallet
20 x 10	100 88 092	60	1.800
25 x 8	100 88 060	60	1.800
30 x 8	100 88 011	48	1.440
30 x 10	100 87 101	40	1.200
35 x 8	100 88 061	48	1.440
*Other profile cross-sections on request			

Profile [HxW]	Article number	m/box	m/pallet
35 x 10	100 77 566	40	1.200
40 x 8	100 88 012	36	1.080
40 x 10	100 87 100	30	900
45 x 10	100 88 062	30	900
50 x 10	100 88 063	30	900

Storage

Store dry and protected from frost, in normal ambient temperature conditions (ideally 15–20°C/ 59–68°F); do not stack anything on top of the boxes.

In these conditions, **TOK®-Band SK** can be stored in its sealed original packaging for at least two years from the date of manufacture.

DENSO GmbH

Felderstrasse 24 | 51371 Leverkusen | Germany
Phone: +49 214 2602-0 | info@denso-group.com
www.denso-group.com

Our product information, application recommendations and other printed publications provide advice to the best of our knowledge and indicate our level of knowledge at the time of printing. The content is not legally binding. Therefore, no liability is assumed for incorrect and missing advice. The applicator is obliged to check the suitability and possibility of application for the intended purpose. Unless otherwise specified, all of the brands named are trademarks of DENSO, at least registered in Germany, which are protected by law.

Only our general terms and conditions of sale, which you will find at www.denso-group.com, apply. This is a translation from the original German product information. In case of any discrepancy or any dispute arising on the interpretation, the German text of the respective German product information, which is available at www.denso-group.com, shall be decisive. The legal relationship shall be governed by German law.

07.2022