


TOK®-Band Spezial Rundstrang

Product Information

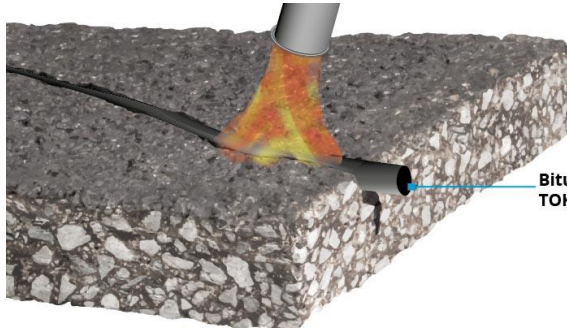

Bitumen Round Profile –
TOK®-Band Spezial Rundstrang

Special Advantages:

- ✓ Simple to work with.
- ✓ Suitable for use in sealing faulty cuts.
- ✓ For cracks in asphalt wearing courses, also for crack widths >5 mm.

TOK®-Band Spezial Rundstrang is a bitumen round profile for a wide range of applications.

For a century now, DENSO Group Germany represents experience, quality and reliability for corrosion prevention and sealing technology. The success of the internationally leading corporation is based on the development of the "DENSO-Tape", which was already patented in 1927 as the first product worldwide for the passive corrosion prevention of pipelines. Since then, the DENSO Group Germany establishes and guarantees the highest quality standards with technically trend-setting products. Research, development and production take place exclusively in Germany. Our employees continuously implement safe and individual solutions in a personal cooperation with the customer.

Product Description and Application

TOK®-Band Spezial Rundstrang is made from the same material as the proven bitumen joint tape, TOK®-Band Spezial. Its rounded profile is used for sealing cracks (for example). Such cracks can even be greater than 5 mm wide. The round profile is worked into the crack as a filling.

Other possible uses include the sealing of incorrect cuts in asphalt surfaces. Also sealable using the round profile are "cross cuts", which are generated at corner points when cutting out rectangular sections.

Attention should be paid in the following:

TOK®-Band Spezial Rundstrang:

- It should always be used with a primer (**TOK®-SK Primer**).

- At lower temperatures, the material should be pre-warmed using a burner, as it is easier to work with when heated.
- The material must be worked into the crack: merely "laying" the round profile on the crack is not sufficient.
- Ideally, the installed round profile is then also covered with **TOK®-SK Rissband**.

Ordering Information and Packaging

Diameter	Length	Rolls	m/box	m/pallet	Order number
8 mm	10 m	6	60	1,800	101 15 109
10 mm	7 m	6	42	1,260	101 14 782

Storage

Store dry and frost-free; do not stack boxes. Under these conditions,

TOK®-Band Spezial Rundstrang can be stored in the sealed original packaging

for at least 3 years from the date of manufacture.



denso-group.com

DENSO GmbH

Felderstrasse 24 | 51371 Leverkusen | Germany
Phone: +49 214 2602-0 | info@denso-group.com
www.denso-group.com

Our product information, application recommendations and other printed publications provide advice to the best of our knowledge and indicate our level of knowledge at the time of printing. The content is not legally binding. Therefore, no liability is assumed for incorrect and missing advice. The applicator is obliged to check the suitability and possibility of application for the intended purpose. Unless otherwise specified, all of the brands named are trademarks of DENSO, at least registered in Germany, which are protected by law.

Only our general terms and conditions of sale, which you will find at www.denso-group.com, apply. This is a translation from the original German product information. In case of any discrepancy or any dispute arising from the interpretation, the German text of the respective German product information, which is available at www.denso-group.com, shall be decisive. The legal relationship shall be governed by German law.

08.2022