


PALIMEX[®]-880



Product information

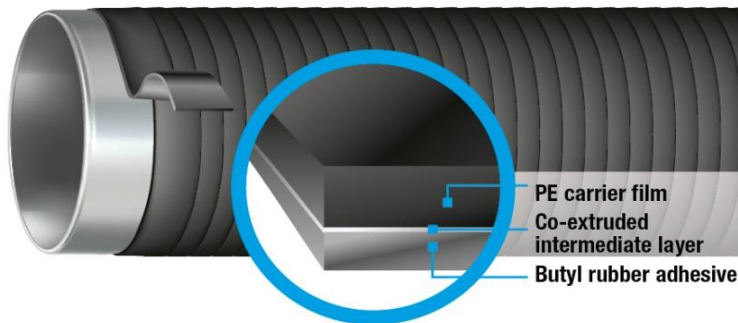

Special advantages:



For temperatures up to +85°C (+185°F).



Excellent mechanical resistance.



Non-permeable to corrosive media.



Highly economical.

Robust inner protection tape for demanding mechanical applications

For a century now, DENSO Group Germany has been representing experience, quality and reliability for corrosion prevention and sealing technology. The success of the internationally leading corporation is based on the development of the "DENSO-Tape", which was already patented in 1927 as the first product worldwide for the passive corrosion prevention of pipelines. Since then, the DENSO Group Germany has been establishing and guaranteeing the highest quality standards with technically trend-setting products. Research, development and production take place exclusively in Germany. Our employees continuously implement safe and individual solutions in a personal cooperation with the customer.

Product description

PALIMEX[®]-880 is a protective tape system for the permanent protection of buried steel and cast iron pipelines. The tape was developed as an economical solution with strong adhesion and high mechanical strength.

The co-extruded two-layer plastic tape is comprised of a stabilised polyethylene carrier material and a thick butyl rubber coating. The innovative design **ensures that the tape is strong and impact-**

resistant. PALIMEX[®]-880 can withstand even the highest mechanical loads. The thick butyl rubber coating ensures that the **surface to be protected is thoroughly coated.**

PALIMEX[®]-880 is available in a range of thicknesses, allowing you to achieve optimum technical and economical results tailored to the requirements of your construction project.

Suitable tape thicknesses can be combined for easy adjustment to your component dimensions, including around bends and moulded parts

For even more efficient application, the tape can be applied with **DENSOMAT[®]** wrapping devices.

Typical product properties

Property	Unit	PALIMEX®-880 Typical value			Test method
		880-20	880-25	880-30	
Colour of carrier film	-	Black, yellow			-
Butyl adhesive colour	-	Black			-
Tape thickness	mm	≥ 0.51	≥ 0.63	≥ 0.76	ISO 4593
Carrier film thickness approx.	mm	≥ 0.25	≥ 0.30	≥ 0.30	
Inside adhesive layer thickness approx.	mm	≥ 0.26	≥ 0.33	≥ 0.46	
Elongation at break*	%	≥ 500			EN 12068
Tape strength*	N/cm	≥ 80			EN 12068
Peel resistance, layer to layer (+23°C / +73°F) *	N/cm	≥ 20			EN 12068
Operating temperature	°C (°F)	-40 to +50 (-40 to +122)			

* Values for tape thickness 0.76 mm (type 880-30).

PALIMEX® tapes are easy to apply by hand. For even greater efficiency, they can also be processed using original **DENSOMAT®** wrapping devices. For **PALIMEX®** tapes with widths of > 50 mm, we recommend the use of the **DENSOMAT®** wrapping device to guarantee an excellent processing quality.

Ordering information and packaging

	Core Ø [mm]	Length [m]	Width [mm]	m ² /roll	Content per box			
					Rolls	m ²	lin. m	kg (approx.)
PALIMEX®-880-20	41	15	50	0.75	12	9	180	5.8
			100	1.5	6	9	90	5.8
			150	2.25	8	18	120	11.1
PALIMEX®-880-25			50	0.75	12	9	180	7.0
			100	1.5	6	9	90	7.0
			150	2.25	9	20.25	135	15.1
PALIMEX®-880-30			50	0.75	12	9	180	8.4
			100	1.5	6	9	90	8.4
			150	2.25	9	20.25	135	18.3

	Core Ø [mm]	Length [m]	Width [mm]	m ² /roll	Content per box			
					Rolls	m ²	lin. m	kg (approx.)
PALIMEX®-880-20	78	60	100	6	3	18	180	10.7
			150	9			120	
PALIMEX®-880-25			100	6			180	13.1
			150	9			120	
PALIMEX®-880-30			100	6			180	15.9
			150	9			120	

Other dimensions available on request.

Storage

When stored in its original, unopened packaging, **PALIMEX®-880** can be stored for at least 60 months after the manufacturing date.

Storage temperature: ≤ +50°C (+122°F)

Store in a dry location and do not rest anything against the front of the product.

DENSO GmbH

P.O. Box 150120 | 51344 Leverkusen | Germany
Phone: +49 214 2602-0
www.denso-group.com | info@denso-group.com

Our product information, our application recommendations and other product related documents are made for your convenience only. Since many installation factors are beyond our control, the user shall determine the suitability of the products for the intended use and assume all risks and liabilities in connection therewith. All information contained in this document is to be used as a guide and does not constitute a warranty of specification. The information contained in the document is subject to change without notice. For this reason, no liability can be accepted for inaccurate advice or any failure to provide advice.

The user is responsible for checking the applications of the product and verifying its suitability for the intended use. Our General Terms of Sale, which are available at www.denso-group.com, shall be decisive without any exception.

This is a translation from the original German product information. In case of any discrepancy or any dispute arising on the interpretation of this product information, the German text of the respective German product information, which is available at www.denso-group.com, shall be decisive. The legal relationship shall be governed by German law.

12.2022